

PIP LIFT SERVICE LTD

NEWS LETTER – APRIL 2011

ST ALBANS – ANOTHER SUCCESSFUL MAJOR CONTRACT

PIP Lift Service have successfully completed for GVA, the full modernisation of a 4 car group originally of Otis manufacture contract value in excess of £300K.


The work as specified by ILECS included the replacement of machines, control systems, car interiors, entrance equipment and general health & safety works.

The contract was completed on time and on budget.



Sassi MF84 machines @ 1.6 m/s
Lester Almega controllers
Magnetek VF drives
New main switches, access steps and
painted machine room.

GAL variable frequency door equipment
Roller guide assemblies
Car top controls

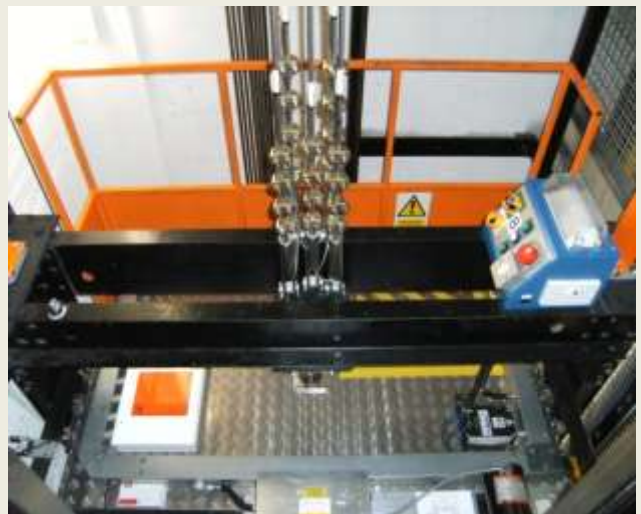



Painted lift shaft
New pit equipment including
hydraulic buffers and health & safety
improvements

Satin stainless doors including landing architraves.
DDA / US91 fixtures including dual
illumination, LED indication and
digital indicator displays.



Low iron back painted glass car
Including new car stations to DDA

Two lifts were completed at a time, by PIP Lift Service direct staff, the 20 week programme finished on scheduled date of 11th March 2011.